


Cartec 800X Rotating Eyebolt with Ring



Part No.	WLL	Size	A	B	C	E	H	SW	D1	Mass
UNI	tonnes	mm	mm	mm	mm	mm	mm	mm	mm	kg
2252 70	1.4	M16x20	30	13	46	50	105	30	38	0.53
2252 71	2.5	M20x30	34	16	57	50	105	30	38	1.05
2252 72	4.0	M24x30	40	19	70	50	105	30	38	1.63
2252 73	6.7	M36x54	40	20	65	50	105	30	38	2.23

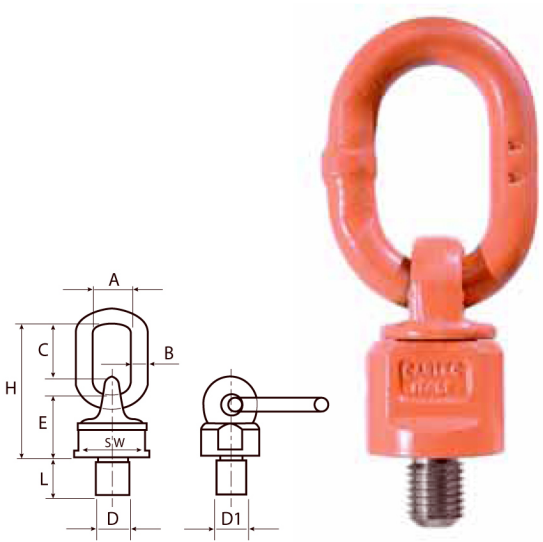

W.L.L (tonnes)													Tighten
Part No.	WLL	Size	1 leg	2 leg	1 leg	2 leg	2 leg	2 leg	2 leg	4 leg	4 leg	4 leg	Nm
UNI	tonnes	mm	0°	0°	90°	90°	0°-45°	45°-60°	assym.	0°-45°	45°-60°	assym.	
2252 70	1.4	M16x20	2.8	5.6	1.4	2.8	2.0	1.4	1.4	3.0	2.12	1.4	70
2252 71	2.5	M20x30	5.0	10.0	2.5	5.0	3.55	2.5	2.5	5.3	3.75	2.5	135
2252 72	4.0	M24x30	8.0	16.0	4.0	8.0	5.6	4.0	4.0	8.0	6.0	4.0	230
2252 73	6.7	M36x54	13.4	26.8	6.7	13.4	9.5	6.7	6.7	14	10	6.7	814

